


## Panel Mounted for 5mm × 20mm Fuses

### HTC-30M


**Ratings:** 250V, 6.3A, 2.5W  
Screwdriver slot

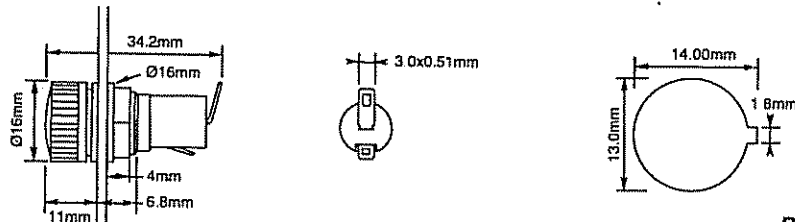

BIF document: 2110

### HTC-35M


**Ratings:** 250V, 6.3A, 2.5W  
Threaded cap

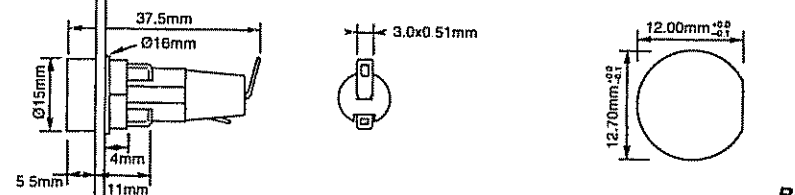

BIF document: 2110

### HTC-40M


**Ratings:** 250V, 6.3A, 2.5W  
Screwdriver slot

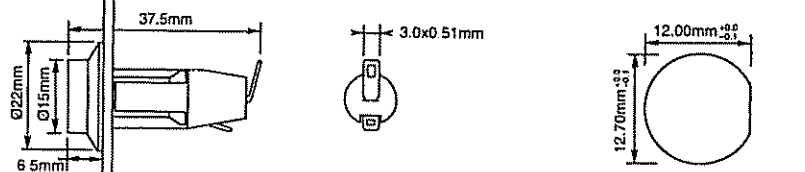

BIF document: 2110

### HTC-55M


**Ratings:** 250V, 6.3A, 2.5W  
Fuse carrier: bayonet type

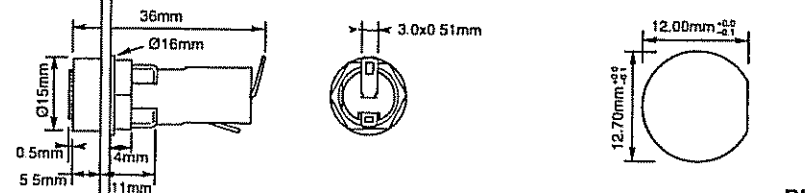

BIF document: 2110

### HTC-70M

**Ratings:** 250V, 10A, 2.5W  
Fuse carrier: bayonet type

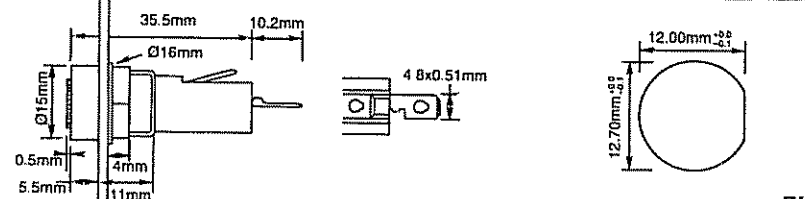

BIF document: 2110

### Specifications

- Terminals:** Brass, tin-plated.
- Molded Materials:** High temperature thermoplastic that meets the flammability ratings of UL 94V0; Glow Wire Test: 960°C per IEC 695-2-1
- Solderability:** In accordance with IEC 68-2-20
- Agency Information:** UL Recognized — Guide IZLT2, File E14853;  
CSA Certified — Class 6225-01, File 47235;  
SEMKO — 9226031 (HTC-30M, HTC-35M); 9226032 (HTC-40M); 9226033 (HTC-55M); 9226034 (HTC-70M)
- Electrical:** Contact Resistance: ≤ 10mΩ; Insulation Resistance: ≥ 10mΩ; Dielectric Strength ≥ 2000 VAC.
- Shock Safety:** PC2 (fuseholders).
- Packaging:** Standard Qty 10 (No Prefix), Bulk Qty 100 (Prefix Catalog Number with BK).

CE logo denotes compliance with European Union Low Voltage Directive (50-1000V AC, 75-1500V DC) Refer to BIF document #8002 or contact Bussmann Application Engineering at 636-527-1270 for more information

